


embedian



SMARC-T4378

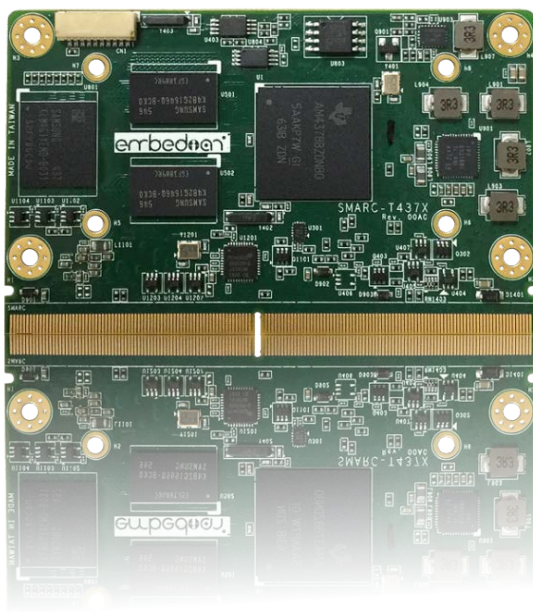

Reduced cost

Mass production equals a better price performance ratio

Improved quality

Mass production equals higher product quality

Improved negotiating power for the buyer

Standards drive product differentiation and competition toward price and service and away from features. This gives buyer both better pricing and better support.

HIGHLIGHTS

- TI Sitara AM4378 ARM Cortex-A9
- 800Mhz or 1GHz Solo Core
- Up to 1GB DDR3L, 4GB eMMC, 2 x SD/MMC
- 24-bit Parallel RGB
- 2CAN, 4UART, 3¹C, 2SPI
- 2 x Gigabit LAN
- Long-term availability (10+ years)
- SMARC 1.0 and 1.1 Compliant

SMARC-T4378 with maximum flexibility

Embedian continues to optimize and expand its portfolio of SMARC solutions for the embedded market. With the Sitara AM4378 processors support for the ARM Cortex-A9 core, extending performance by up to 40 percent over the Sitara AM335X processor line and up to 1GHz. These high performance successors to the popular SMARC-T335X platform integrate additional features to support a variety of markets from human machine interfaces (HMI) to IoT gateways to industrial automation.

The benefits of standardization are listed as follows.

Standard architectures

Allows software teams to develop new applications faster with fewer people.

Scalable and flexible

More module offerings can be applied to the same platform.



modularized
design

low power

wide

temperature

extensive

supports

cost

effective

high

performance

long

lifecycle

Technical Information


SMARC-T4378 Module

Processor	TI Sitara AM4378 800Mhz or 1GHz ARM Cortex-A9
Memory	Onboard 4GB eMMC Onboard DDR3 up to 1GB Onboard 4MB SPI NOR Flash Onboard 4KB EEPROM
Networking	2 x 10/100/1000Mbps Ethernet
Display	24-bit Parallel RGB
Expansion	2 x SD/SDHC, USB Host 2.0
USB	1 x USB Host 2.0, 1 x USB OTG
Additional Interfaces	4 x UARTs, 2 x SPIs, 3 x I2C, 1 x I2S, 2 x CAN Bus, PWM, 12 x GPIOs
SW Support	Linux 4.1.10 Yocto or Android Kitkat
Power	2.0 Watts typical

Evaluation Carrier (mini-ITX, 12V)

Ethernet	2 (RJ45)
RS 232	4 (DSUB and 2mm header)
USB	1 mini B and 1 Type A
SDMMC	4GB eMMC on Carrier
SD/SDIO Card Slot	1
CAN Bus	2 (10-way 2mm header)
SPI	2 (14-way 2mm header)
I2C	2 (14-way 2mm header)
GPIO	1 (14-way 2mm header)
Parallel LCD	1 (24-bit DSUB15)
Stereo Audio	1 (3.5mm Audio Jack)
SMARC Compliance	1.8V and 3.3V VDDIO

Block Diagram

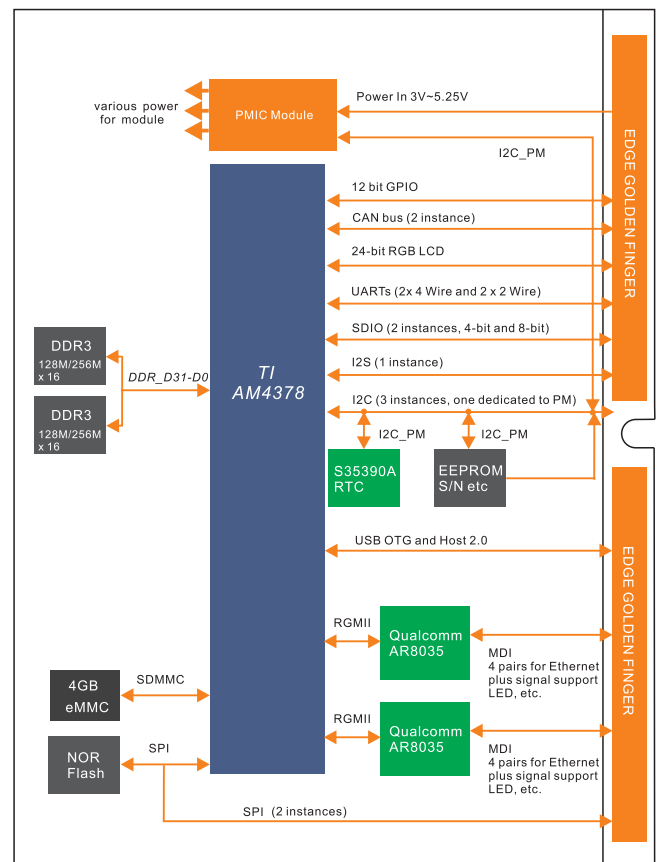

Evaluation Kit – Accelerated Design

The SMARC-T4378 Evaluation Kit is intended to serve multiple needs and summarized as followed:

- SMARC-T4378 bring-up platform for hardware and software development.
- Module validation platform.
- Customer evaluation platform.
- Customer design reference.
- Manufacturing test platform.
- Flexible prototyping vehicle (facilitated by multiple mezzanines).

